

CORDLESS

PNEUMATIC

DRILLING

ROTARY & DEMOLITION

FASTENING

GRINDING & CUTTING

POLISHING / SANDING

SAWING

PLANING / ROUTING

AIR DISPLACEMENT

ENGINE

ACCESSORIES

PLANERS

P20ST 82mm Planer



- Lightweight and compact at only 2.5kg and 296mm in length allowing easy handling and job versatility
- Max cutting depth of 1.5mm and rebating depth of 9mm to handle the toughest jobs
- High rotation speed to ensure smooth finish
- Soft grip for improved user comfort
- Able to be connected to dust extraction equipment (with optional accessories, see below)

Specifications

999021

Input power	580W
No load speed	17,000 (min-1)
Max. cutting width	82mm
Blade type	82mm reversible TCT blade x 2
Max. cutting depth	1.5mm
Weight	2.5kg
Length	296mm
Standard accessories	Blades, blade setting gauge, guide and wrench



4 9 6 6 3 7 6 2 0 7 5 2 7

P20SF(H1) 82mm Planer 02025813




- Lightweight and compact at only 2.5kg and 296mm in length allowing easy handling and job versatility
- Max cutting depth of 2.6mm and rebating depth of 9mm to handle the toughest jobs
- High rotation speed to ensure smooth finish
- Blade protection stand to protect the blade from catching when placing the tool down
- Soft grip handle for improved user comfort
- Cord holder to keep power cord away from job application
- Heavy duty aluminium housing helps to prevent overheating and therefore extending tool life
- Able to be connected to dust extraction equipment (with optional accessories)

Specifications

999021

Input power	620W
No load speed	17,000 (min-1)
Max. cutting width	82mm
Blade type	82mm reversible TCT blade x 2
Max. cutting depth	2.6mm
Weight	2.5kg
Length	296mm
Standard accessories	Carry case, blade setting gauge, guide and wrench



Optional Dust Adaptor (334502)

Enables Attachment



Optional Dust Bag (322955) suits P20ST and P20SF



Optional Elbow (334503) suits P20ST and P20SF

Enables Attachment

*Optional dust collector, dust bag or elbow can be attached to the P20ST or P20SF by simply installing an optional dust adaptor (334502)



4 9 6 6 3 7 6 2 0 4 3 9 7



Safety Switch



Replaceable Blades



Cord Holder



Blade Protector

P13F 330mm Planer



- Four column locking mechanism secures the cutter head in place, virtually eliminating snipe
- Top-mounted rollers for smooth and easy handling of the work piece
- Dual-position carriage crank handle for the most comfortable operating position
- Automatic feed system ensures optimal material feed rate
- Tool and accessory storage compartment for added convenience
- 3-position depth stop ensures quick and easy adjustment to most frequently used thicknesses
- Stainless steel table for superior durability and smooth operation
- Includes 2 x 330mm HSS blades


Specifications

Capacity	Operating height: 152.4mm
	Cutting width: 330.2mm
	Cutting depth: 2.4mm
Input power	1,800W
Rotation speed	9,250 (min-1)
Weight	46kg
Table size	325 x 918mm (approx.)
Standard accessories	Blades, stand, spanner, hex key and blade setting gauge



4 9 6 6 3 7 6 1 5 1 6 1 5

Accessories for Planers

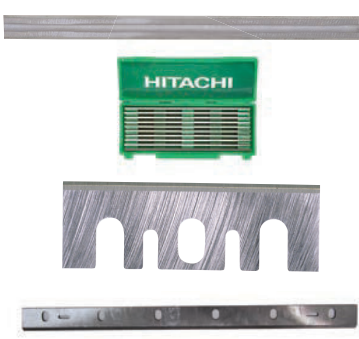	Length (mm)	Description	Part No.	Barcode
	82	2 x reversible TCT blades	750470	8717472818812
	82	10 x reversible TCT blades	750471	8717472818829
	82	2 x HSS planer blades (for P20SB HSS model only)	750473	8717472818843
	330	1 x HSS blade (22mm wide for P13F)	328935	9323624015917
	330	1 x HSS blade (12mm narrow for P13F)	726341	9323624004386

TRIMMER

Specifications

999021

Collet chuck	6mm
Input power	400W
No load speed	30,000 (min-1)
Weight	1.4kg
Length	200mm
Standard accessories	Trimmer guide assembly, straight guide, template guide and wrench



- Ball bearing construction for increased service life
- Base angle adjustment of 0 – 45°
- Fine adjustment dial for detailed work and easy setting of cutting depth
- Compact and robust



M6SB
6mm Trimmer

SINGLE SPEED ROUTERS

Specifications

999043

Collet chuck	8mm
Input power	1,010W
No load speed	25,000 (min-1)
Main body stroke	60mm
Weight	3.5kg
Standard accessories	1/4" collet, straight guide, template guide and wrench



- Powerful 1,010W motor allows efficient use for plunge cutting and edge rounding applications
- Lightweight and compact allowing easy handling and job versatility when performing free hand cutting
- 60mm stroke capacity
- Convenient switch placement for increased useability
- High cutting feed rate ensures quick and clean cutting



M8SA2
8mm Single Speed Router

Fine adjustment knob
available separately
318304

Specifications

999038

Collet chuck	12mm
Input power	1,700W
No load speed	22,000 (min-1)
Main body stroke	65mm
Weight	5.3kg
Standard accessories	Straight guide, template guide and wrench



- Powerful 1,700W motor allows efficient plunge cutting and edge rounding applications
- Lightweight and compact allowing easy handling and job versatility when performing free hand cutting
- Angle adjustable handle allows for improved ergonomics and handling
- 65mm stroke capacity
- Height adjustable cutting scale for increased accuracy and fine adjustment
- Switch and depth lock allows single handed operation to allow for increased efficiency and safety
- 12mm and 8mm collet chuck size capacity



M12SE(H1)
12mm Single Speed Router
02025796

CORDESS

PNEUMATIC

DRILLING

ROTARY & DEMOLITION

FASTENING

GRINDING & CUTTING

POLISHING / SANDING

SAWING

PLANING / ROUTING

AIR DISPLACEMENT

ENGINE

ACCESSORIES

CORDLESS

PNEUMATIC

DRILLING

ROTARY &
DEMOLITION

FASTENING

GRINDING
& CUTTING

POLISHING /
SANDING

SAWING

PLANING /
ROUTING

AIR
DISPLACEMENT

ENGINE

ACCESSORIES

VARIABLE SPEED ROUTERS

M8V2

8mm Variable Speed Router



- Powerful 1,150W motor allows efficient use for plunge cutting and edge rounding applications
- Lightweight and compact allowing easy handling and job versatility when performing free hand cutting
- 60mm stroke capacity
- Variable speed dial on handle for easy use during operation
- Soft start for smooth starting and safe usage
- Electronic speed control for constant speed under load

Specifications

999043

Collet chuck	8mm
Input power	1,150W
Full load speed	11,000 – 25,000 (min-1)
Main body stroke	60mm
Weight	3.6kg
Standard accessories	1/4 collet, straight guide, template guide, wrench and carry case



M12VE(H1)

12mm Variable Speed Router



- Powerful 2,000W motor allows efficient plunge cutting and edge rounding applications
- Lightweight and compact allowing easy handling and job versatility when performing free hand cutting
- Variable speed dial on handle for easy use during operation
- Soft start for smooth starting and safe usage
- Electronic speed control for constant speed under load
- Three stage revolving depth stop for accurate repetitive plunge cuts
- Switch and depth lock for single handed operation to allow for increased efficiency and user safety
- 12mm and 8mm collet chuck size capacity

Specifications

999038

Collet chuck	12mm
Input power	2,000W
No load speed	8,000 – 22,000 (min-1)
Main body stroke	65mm
Weight	5.3kg
Standard accessories	Straight guide, template guide and wrench

